



Apple File Server Preference

- Corrects the user log in AFP from showing grayed out users.
- Set admin so they see the volumes of the server (when they go to Go Connect to Server) rather than the share points.
- If the file has been edited before and pico does not look like below then run this:
 - `plutil -convert xml1 /Library/Preferences/com.apple.AppleFileServer.plist`

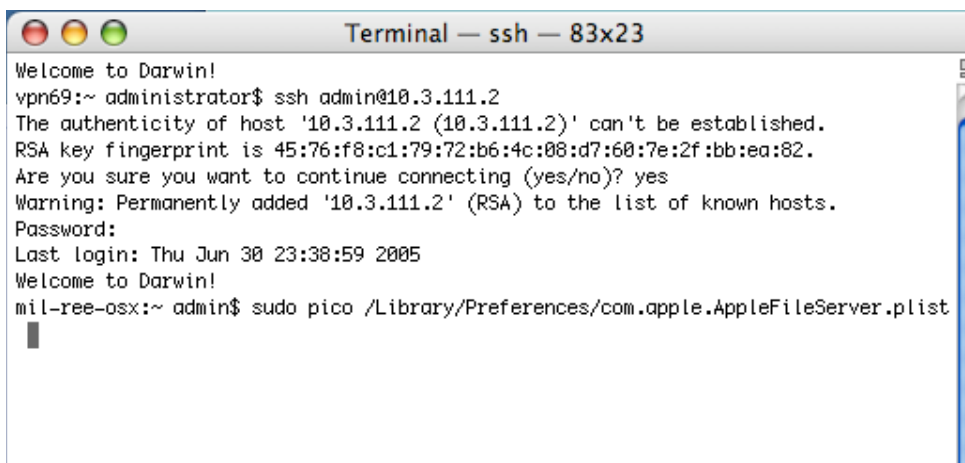

```
Terminal — ssh — 83x23
Welcome to Darwin!
vpn69:~ administrator$ ssh admin@10.3.111.2
The authenticity of host '10.3.111.2 (10.3.111.2)' can't be established.
RSA key fingerprint is 45:76:f8:c1:79:72:b6:4c:08:d7:60:7e:2f:bb:ea:82.
Are you sure you want to continue connecting (yes/no)? yes
Warning: Permanently added '10.3.111.2' (RSA) to the list of known hosts.
Password:
Last login: Thu Jun 30 23:38:59 2005
Welcome to Darwin!
mil-ree-osx:~ admin$ sudo pico /Library/Preferences/com.apple.AppleFileServer.plist
```

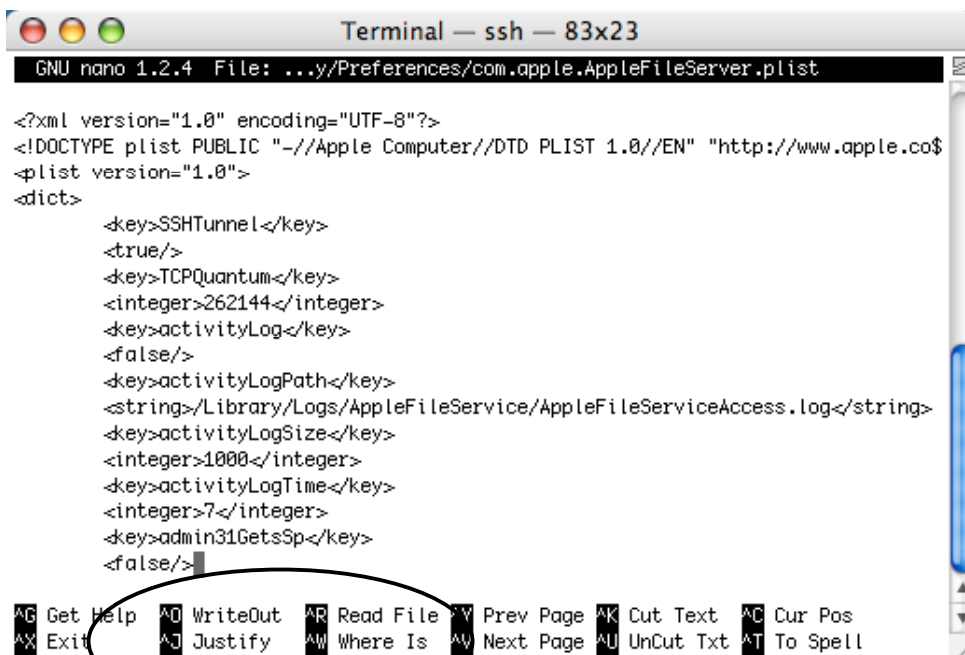

```
Terminal — ssh — 83x23
GNU nano 1.2.4 File: ../Preferences/com.apple.AppleFileServer.plist
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plist PUBLIC "-//Apple Computer//DTD PLIST 1.0//EN" "http://www.apple.co$
<plist version="1.0">
<dict>
  <key>SSHTunnel</key>
  <true/>
  <key>TCPQuantum</key>
  <integer>262144</integer>
  <key>activityLog</key>
  <false/>
  <key>activityLogPath</key>
  <string>/Library/Logs/AppleFileService/AppleFileServiceAccess.log</string>
  <key>activityLogSize</key>
  <integer>1000</integer>
  <key>activityLogTime</key>
  <integer>7</integer>
  <key>admin31GetsSp</key>
  <false/>
^G Get Help ^O WriteOut ^R Read File ^Y Prev Page ^K Cut Text ^C Cur Pos
^X Exit ^J Justify ^W Where Is ^N Next Page ^U UnCut Txt ^T To Spell
```

- Set `admin31GetsSp = false`

```
GNU nano 1.2.4 File: ../Preferences/com.apple.AppleFileServer.plist

<key>recon1SrvrKeyTTLHrs</key>
<integer>168</integer>
<key>recon1TokenTTLmins</key>
<integer>10080</integer>
<key>reconnectFlag</key>
<string>no_admin_kills</string>
<key>reconnectKeyLocation</key>
<string>/private/etc/AFP.conf</string>
<key>reconnectTTLInMin</key>
<integer>5</integer>
<key>registerAppleTalk</key>
<true/>
<key>registerNSL</key>
<true/>
<key>sendGreetingOnce</key>
<false/>
<key>shutdownThreshold</key>
<integer>3</integer>

^G Get Help  ^O WriteOut  ^R Read File  ^Y Prev Page  ^K Cut Text   ^C Cur Pos
^X Exit      ^J Justify   ^W Where Is  ^V Next Page  ^U UnCut Txt ^T To Spell
```

- Set reconnectTTLInMin = 5